

MP7812 2 Zones All-in-one Amplifier with MP3/Tuner/CD/CD/DVD



Features

- 70V, 100V & 4-16 Ω , rated power 60W/120W/250W/350W
- 1 video input, 1 aux input, 4 Mic XLR input
- Equipped USB interface. Able to supports common USB flash disk
- Built in DVD player and tuner with remote control.
- Bass and treble control.


Description

This series of amplifiers are rated from 60W to 350W. There are 1 video input, 1 aux input, 4 Mic XLR input. Bass and treble controls and master volume control are provided. A remote chime trigger could be used to activate the amplifier built-in pre announcement chime tone. Extensive protection with indicator from short-circuit, overload and high temp.

Specification

Model	MP7812
Rated output	120W
Output method	4-16 Ω balanced output, 70V & 100V fixed-voltage outputs
Input	MIC1, 2, 3 & 4: 600 Ω , 2.5mV-500mV, balanced AUX: 10k Ω , 250mV(\pm 50mV), unbalanced
Frequency response	MIC: 100Hz-15kHz (\pm 3dB) AUX: 40Hz-20kHz (\pm 3dB)
Harmonic distortion	< 0.5% (1kHz, 1/3 rated power)
Line S/N (4 Ω output)	70dB
Microphone S/N (4 Ω output)	70dB
Protection	AC fuse, DC output protection, and overload protection
Power consumption	250W
Outer Packing Size (mm)	(L \times W \times H)520 \times 500 \times 235
Unit Size (mm)	(L \times W \times H)430 \times 400 \times 132
Gross weight	14.5kg
Net weight	17kg

Rear Panel

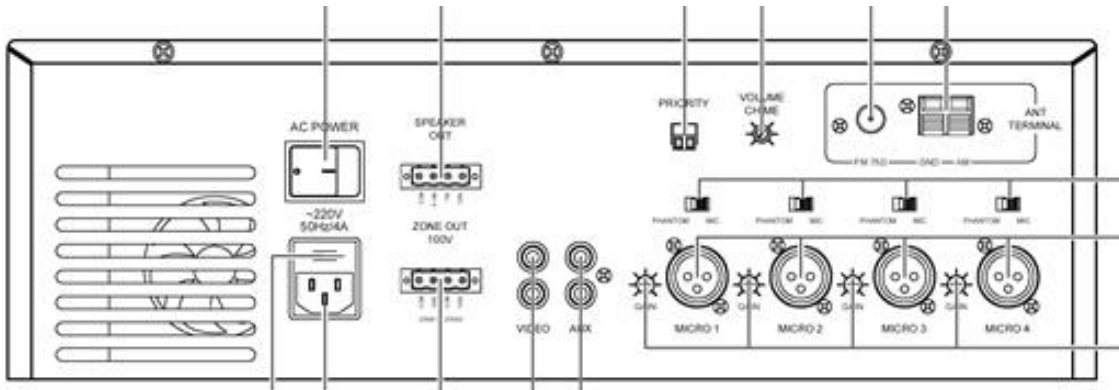

Connection

