

MP9006 5MIC&2AUX USB/FM Mixer Amplifier



Features

- 70V, 100V & 4-16 Ω, rated power 60W
- 5 microphone inputs, 2 aux line input & 1 channel line output
- Self protection from short circuit, overload and high temp
- Individual volume control for each microphone and line input
- Bass and treble control.

Description


This mixing amplifier is rated at 60W. It has 5 unbalanced microphones inputs and 2 aux inputs. Bass and treble controls and master volume control are provided. Tuning and MP3 converting play is very convenient.

This amplifier can be applied to different cases, such as supermarket, classroom, etc.

Specification

Model No.	MP9006
Rated output	60W
Speaker output	70V, 100V & 4-16 Ω,
Input sensitivity	Mic1,2,3,4,5 with phantom power supply (optional): 600Ω, 2.5mV(±0.5mV)
	AUX1,2 : 10kΩ , 250mV(±50dB)
	EMC IN : The 10kΩ, 250mV(±50mV)
Frequency response	Line : 50Hz-20kHz (±3dB); Mic : 100Hz-10kHz (±3dB)
Harmonic distortion	Less than 1% at 1kHz, 1/3 rated output voltage
Signal/noise ratio	Mic1, Mic2, Mic3 and Mic4, Mic5 : 70dB
	AUX1 and AUX2 : 75dB
	Treble : ±10dB (10kHz)
Protection	AC fuse×1, overload, short-circuit
Power consumed	100W
Outer Packing Size (mm)	(L×W×H)525×460×140
Unit Size (mm)	(L×W×H)430×368×88
Gross weight	13.5kg
Net weight	11.5kg

Rear Panel

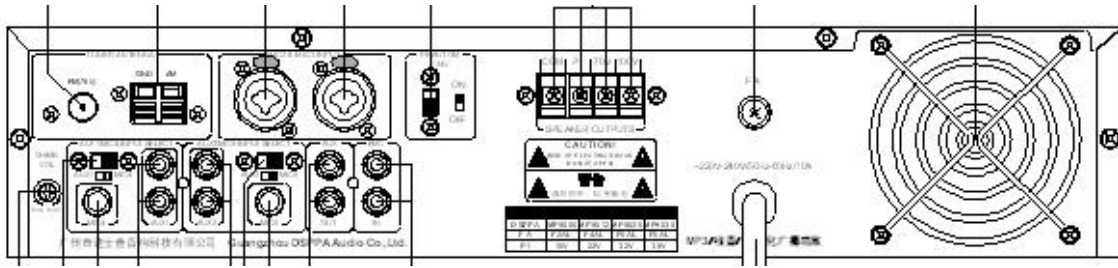

Connection

