


## MP60H 60W Integrated Amplifier

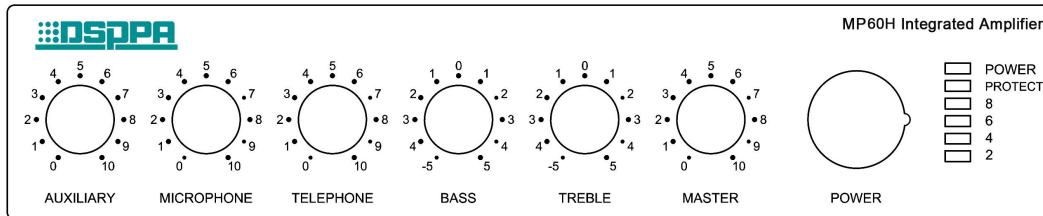

### Features

- 1-channel AUX input with individual control; 1-channel MIC input; 1-channel TEL input;
- 1-channel MOH output with impedance and level adjustable; 12V DC output, can connect with third-party equipment
- With muting function of MIC and TEL (switchable), and dry contact of the third-party equipment of muting input
- 25V/ 70V constant pressure output and 8  $\Omega$  constant resistance output;
- AC~120V/ 60Hz
- With master volume control; microphone, telephone volume control; treble, bass tone control.

### Description

MP60H is a small mixer amplifier, compact, cost-effective. Suitable for small-sized broadcast system, the background music in supermarket, and public address in the campus.

## *Specification*

Model	MP60H
Power Output	60W
Consumption	Less than 0.5%
Input Auxiliary	47k $\Omega$ , 200mV, Unbalanced
Input MIC	250k $\Omega$ , 1mV, Unbalanced
Input Telephone	10K/ 600 $\Omega$ , 100mV, switchable, balanced
MOH Output	10K/ 600 $\Omega$ , 100mV, switchable, balanced
Output $\Omega$	8 $\Omega$ , 25V, 70V
Controls Front	AUX volume, MIC volume, TEL volume, BASS, TREBLE
Controls Rear	AUX gain, Chime level, MOH level, Vox sens
Phantom Power	Mic input(customized)
MOH source	AUX input
Tone Control	$\pm$ 10dB at 100Hz and 10K Hz
VOX	Voice activated muting
Direct Muting	External contacts
Rack Mounting	Optional rack kit for single or side by side use
Power Supply	AC~120V, 60Hz
Power Consumption	230VA
Terminations	Phoenix connectors- RCA jacks
Indicators	LED- Power- Protect- Signal level
Chassis Finish	High durability black finish
Dimension	11.5"×8.5"×1.75"
Net Weight	3LBS